




“Specialists in Expanded Metal Building Products”

DOUBLE “J” EXPANSION CONTROL JOINT

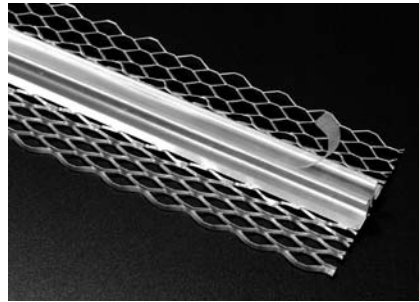

| Double J Expansion Control Joint | Length | Ctns/Pallet | Nominal Lbs/Ctn | Nominal Lbs/Plt |
|---|---------------|--------------------|------------------------|------------------------|
| 1/2" | 10' | 40 | 74 | 2960 |
| 3/4" | 10' | 40 | 80 | 3200 |
| 7/8" | 10' | 40 | 84 | 3360 |

24pcs/ctn – 240' per ctn

The Double “J” Expansion Control Joint is used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement. The Double “J” shaped shoulders provide a more secure stucco bond. Comes pre-taped to ensure a clean finish.

ASTM C653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process.

ASTM C841 - Standard specification for installation of interior lathing and furring.

ASTM C1047 - Standard specification for gypsum wallboard and gypsum veneer base accessories.

NILES BUILDING PRODUCTS CO.

Company Headquarters
1600 Hunter Street
Niles, Oh 44446

Dallas/Fort Worth Service Center
6400 Wuliger, Ste A
North Richland Hills, TX 76180

Southeast Distribution Center
1325 Cobb International Dr
Kennesaw, GA 30152

Phone: 800-323-3329
Fax: 330-544-8868

www.nilesbldg.com