




**“Specialists in Expanded Metal Building Products”**

## **DOUBLE “V” EXPANSION CONTROL JOINT**

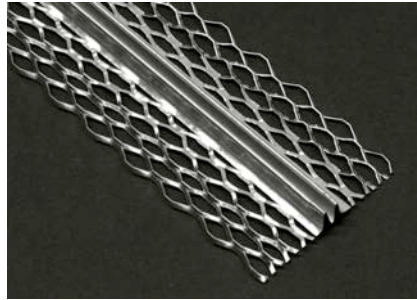

<b>Double V Expansion Control Joint</b>	<b>Length</b>	<b>Ctns/Pallet</b>	<b>Nominal Lbs/Ctn</b>	<b>Nominal Lbs/Plt</b>
1/4"	10'	42	45	1890
3/8"	10'	42	48	2016
1/2"	10'	40	66	2640
5/8"	10'	40	70	2800
3/4"	10'	40	74	2960
7/8"	10'	40	83	3320

24pcs/ctn – 240' per ctn

**The Double “V” Expansion Control Joint is used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.**

ASTM C653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process.

ASTM C841 - Standard specification for installation of interior lathing and furring.

ASTM C1047 - Standard specification for gypsum wallboard and gypsum veneer base accessories

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement-based plaster

## **NILES BUILDING PRODUCTS CO.**

Company Headquarters  
1600 Hunter Street  
Niles, Oh 44446

Dallas/Fort Worth Service Center  
6400 Wuliger, Ste A  
North Richland Hills, TX 76180

Southeast Distribution Center  
1325 Cobb International Dr  
Kennesaw, GA 30152

Phone: 800-323-3329

Fax: 330-544-8868

[www.nilesbldg.com](http://www.nilesbldg.com)