




**“Specialists in Expanded Metal Building Products”**

## **DOUBLE “V” EXPANSION CONTROL JOINT - ZINC**

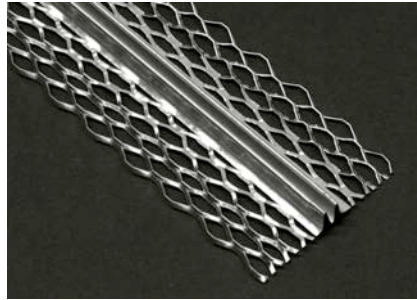

<b>Double V Expansion Control Joint</b>	<b>Length</b>	<b>Ctns/Pallet</b>	<b>Nominal Lbs/Ctn</b>	<b>Nominal Lbs/Plt</b>
1/4"	10'	42	43	1806
3/8"	10'	42	45	1890
1/2"	10'	40	58	2320
5/8"	10'	40	63	2520
3/4"	10'	40	68	2720
7/8"	10'	40	72	2880

24pcs/ctn – 240' per ctn

**The Double “V” Expansion Control Joint Zinc is used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.**

ASTM B69-87 - Standard specification for flat rolled zinc. Approximately 99% pure zinc.

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement-based plaster

ASTM C841 - Standard specification for installation of interior lathing and furring

## **NILES BUILDING PRODUCTS CO.**

Company Headquarters  
1600 Hunter Street  
Niles, Oh 44446

Dallas/Fort Worth Service Center  
6400 Wuliger, Ste A  
North Richland Hills, TX 76180

Southeast Distribution Center  
1325 Cobb International Dr  
Kennesaw, GA 30152

Phone: 800-323-3329  
Fax: 330-544-8868

[www.nilesbldg.com](http://www.nilesbldg.com)