




“Specialists in Expanded Metal Building Products”

SELF-FURRED DIAMOND MESH PAPER BACK LATH SPECIFICATION

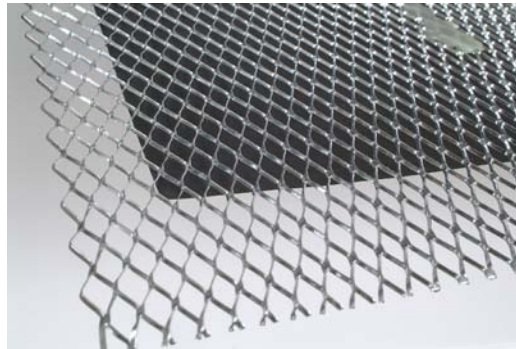

Wt. Per Sq. Yd.	Sheet Size	Pcs. / Bdl	Yds. / Pallet
1.75 lbs.	27" x 96"	10	500
2.50 lbs.	27" x 96"	10	500
3.40 lbs.	27" x 96"	10	500

25 bundles per pallet

Niles's Self-Furred Diamond Metal Lath provides a ¼" indentation in the metal lath to hold away from the sheathing base and reinforcement (plaster embedment) for all types of walls and fireproofing of steel beam and columns. Provides ample keying for scratch coat and is commonly used for plaster machine application. This lath is produced with ASTM A653 standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by hot-dip process. The paper is a Type-1, Grade "D", Style-2.

ASTM C841 Standard specification for installation of interior lathing and furring

ASTM C847 Standard specification for Metal Lath (2.5 and 3.4 only)

Meets or exceeds federal specification no. UU-B-790A

NILES BUILDING PRODUCTS CO.

Company Headquarters
1600 Hunter Street
Niles, Oh 44446

Dallas/Fort Worth Service Center
6400 Wuliger, Ste A
North Richland Hills, TX 76180

Southeast Distribution Center
1325 Cobb International Dr
Kennesaw, GA 30152

Phone: 800-323-3329
Fax: 330-544-8868

www.nilesbldg.com