




“Specialists in Expanded Metal Building Products”

NILES 2-A CORNER BEAD - ZINC

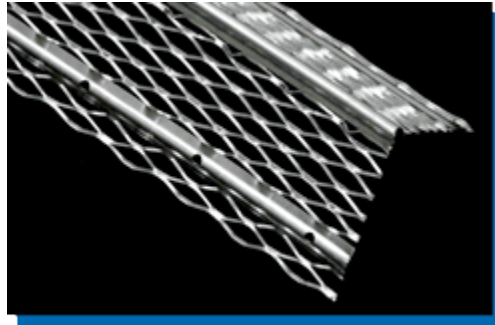

Niles 2-A Corner Bead Standard 3-1/4" x 3-1/4" - Zinc	Ft/Ctn	Ctns/Pallet
10'	300'	25

10' Lengths – 30 pcs/ctn – 300' per ctn

The Niles 2-A Corner Bead Zinc with a wing size 3-1/4" x 3-1/4", it is used to reinforce external corners in Portland cement stucco applications. The 3-1/4" wider expanded flanges provide additional rigidity and strength, which can easily be flexed over irregular or uneven corners, allowing for complete embedment of the entire bead, especially near the nose where strength is needed most. The solid metal nose provides rigidity for straight corners.

ASTM B69-87 - Standard specification for flat rolled zinc. Approximately 99% pure zinc.

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement-based plaster

ASTM C841 - Standard specification for installation of interior lathing and furring

ASTM C1861 - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street
Niles, Oh 44446
Phone: 800-323-3329
Fax: 330-544-8868

www.nilesbldg.com